

Hitachi Power Tools Spares & Accessories

HITACHI
POWER TOOLS



Hitachi Power Tools, Spares & Accessories

OUTLETS NATIONWIDE

558

Power Tools Spares & Accessories

Quality Control

Under a stringent quality control programme, Hitachi Power Tools are without exception subjected to rigid inspections and tests at each stage of manufacture. Each part is meticulously scrutinised for flaws by expert

inspectors. Components are thoroughly tested at assembly lines to ensure optimum performance, and each finished product is carefully examined to ensure uniform quality.

Product Warranty

The primary concern of Hitachi Power Tools

is the convenience and satisfaction of the customer. To this end, each Hitachi Power Tool is carefully tested and inspected, and offer a one year guarantee against any defects in workmanship and materials.



560-561

Cordless Range



561

Cordless Accessories



562-565

Drilling



565-567

Rotary Hammer Drills



568

Breakers & Chipping Hammers



569

Demolition Hammers



570-573

Angle Grinders & Polishers



574

Die Grinders



575

Shears & Nibblers



575-576

Circular Saws



577-578

Jig Saws



578

Reciprocating Saws



578-579

Routers



580

Planers



581-582

Orbital Sanders



582

Belt Sanders



583

Screwdrivers



584

Impact Wrenches




584

Blower



585

Cut-off Machine



585

Mitre Saws



586-587

Magnetic Base Drills



587

Core Drill Grinder



588

Beveling Machines



588

Steel Circular Saw




589

Core Drill Cutters



590

Accessories

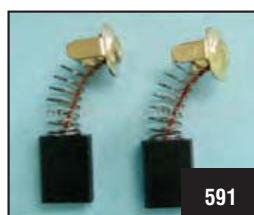

591

Carbon Brush Selection Chart

Hitachi Power Tools,
Spares & Accessories

HTC-DS9DVF3 10mm - 9.6V DRIVER DRILL - 2 SPEED - VAR/REV

- * Soft grip handle
- * Max torque in lock: 22Nm (195in.-lbs.)
- * Fan-cooled motor with 2-speed gear
- * 10mm keyless chuck
- * Capacity for mild steel: 10mm
- * Adjustable clutch: 22-stage torque
- * Adjustable hook with bit holder
- * 2 x 1.4Ah batteries EB914S with 30-min. charger UC18YG
- * Supplied with torchlight UB12D and bit set

Specifications:

Drill Chuck	0.8 - 10mm (1/32 - 3/8") Keyless
Capacity: Mild Steel	10mm (3/8")
Soft Wood	21mm (13/32")
Wood Screw (DxL)	5.8mm x 45mm (#12 x 1-25/32")
Machine Screw	6mm (1/4")
Battery Voltage	9.6V
No Load Speed: High	0 - 840/min.
Low	0 - 280/min.
Maximum Torque in Lock	22Nm (195 in.-lbs.)
Torque Setting and Clutch	1- 6Nm (9-52in.-lbs.)
Overall Length	198mm (7-3/4")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	2 Batteries (EB914S), Charger (UC18YG), Driver Bit, Carry Case, Torchlight & Bit Set



HTC-DS12DVF3 12mm - 12V DRIVER DRILL - 2 SPEED - VAR/REV

- * Soft grip handle
- * Max torque in lock: 26Nm (230in.-lbs.)
- * Fan-cooled motor with 2-speed gear
- * 10mm keyless chuck
- * Capacity for mild steel: 12mm
- * Adjustable clutch: 22-stage torque
- * Adjustable hook with bit holder
- * 2 x 1.4Ah batteries EB1214S with 30-min. charger UC18YG
- * Supplied with torchlight UB12D and bit set

Specifications:

Drill Chuck	0.8 - 10mm (1/32 - 3/8") Keyless
Capacity: Mild Steel	12mm (15/32")
Soft Wood	25mm (1")
Wood Screw (DxL)	5.8 x 63mm (#12 x 2-1/2")
Machine Screw	6mm (1/4")
Battery Voltage	12V
No Load Speed: High	0 - 1,050/min.
Low	0 - 350/min.
Torque Setting	1-6 Nm (9-52 in.-lbs.)
Overall Length	221mm (8-3/4")
Weight	1.5kg (3.3 lbs.)
Standard Accessories	2 Batteries (EB1214S), Charger (UC18YG), Driver Bit, Carry Case, Torchlight & Bit Set



HTC-DH36DL SDS+ - 36V ROTARY HAMMER 2 SPEED (2 ACTION MODE)

- *36V, 2.6Ah capacity Lithium-ion battery BSL3626
- * 80 minute charger UC36YRL
- * 2 mode power: Save mode to prevent bending of small bits and Power mode for large bits
- * 2 mode action: Drilling only and hammer drilling
- * Lightweight 3.9kg
- * Compact 322mm long
- * Fan cooled, durable motor with replaceable carbon brushes
- * Soft grip handle
- * Fastest drilling speed in its class

Specifications:

Capacity: Concrete	26mm (1")
Mild Steel	13mm (1/2")
Bit Shank	SDS-plus
Voltage	36V
No Load Speed	0 - 550/min. 0 - 1,100/min.
Impact Rate	0 - 2,250/min. 0 - 4,500/min.
Weight	3.9kg (8.6lbs)
Overall Length	322mm (12-11/16")
Standard Accessories	Battery (BSL3626), Charger (UC36YRL), Side Handle, Depth Gauge, Carry Case



HTC-DH36DAL SDS+ - 36V

ROTARY HAMMER 2 SPEED (3 ACTION MODE)

- * 36V, 2.6Ah capacity Lithium-ion battery BSL3626
- * 80 minute charger UC36YRL
- * 2 mode power: Save mode to prevent bending of small bits and Power mode for large bits
- * 3 mode action: Drilling only, hammer drilling and hammering only
- * Lightweight 4.0kg

- * Compact 322mm long
- * Fan cooled, durable motor with replaceable carbon brushes
- * Fastest drilling speed in its class



Specifications:

Capacity: Concrete	26mm (1")
Mild Steel	13mm (1/2")
Bit Shank	SDS-plus
Voltage	36V
No Load Speed	0 - 550/min. 0 - 1,100/min.
Impact Rate	0 - 2,250/min. 0 - 4,500/min.
Weight	4.0kg (8.8lbs)
Overall Length	322mm (12-11/16")
Standard Accessories	Battery (BSL3626), Charger (UC36YRL), Side Handle, Depth Gauge, Carry Case

36v

Li-ion BATTERY



BATTERY & CHARGER COMBINATION TABLE

Battery			Work Capacity	Charger			For Model
Voltage	Type	Capacity		HTC-UC18YRL	HTC-UC24YFB	HTC-UC24YFA	
9.6V	FEB9	1.3Ah	12.5Wh	18 min.	-	35 min.	DS9DVF3
	EB914	1.4Ah	13.4Wh	20 min.	-	40 min.	
	EB924	2.4Ah	23.0Wh	35 min.	-	60 min.	
12V	EB12H**	2.2Ah	26.4Wh	35 min.	-	55 min.	DS12DVF3, DV12DV, WH12DM2, WH12DMR, WR12DM2, WR12DMR, UB12D, UB12DL
	EB1214L*	1.4Ah	16.8Wh	20 min.	-	40 min.	
	EB1230H**	3.0Ah	36.0Wh	45 min.	-	70 min.	



* Nickel Battery ** Nickel-Metal Hydride Battery

HTC-UC18YRL 7.2 - 18V CHARGER



Specifications:

Charging Voltage	7.2 - 18V
Battery: Type	Cassette
Assortment	Lithium-ion, Super Nickel-Metal Hydride, Nickel-Metal Hydride and Nickel-Cadmium
Fan Cooling	Yes



- * Suitable for Lithium-ion, Super Nickel-Metal Hydride, Nickel-Metal Hydride and Nickel-Cadmium
- * Features cooling fan and rapid charging

HTC-UC36YRL 25.2 - 36V CHARGER



Specifications:

Charging Voltage	25.2 - 36V
Battery: Type	Slide
Assortment	Lithium-ion
Fan Cooling	Yes



- * Suitable for 25.2 - 36V Lithium-ion slide batteries
- * Features cooling fan for longer service life and rapid charging

HTC-BSL3626 36V - 2.6Ah CASSETTE LITHIUM-ION BATTERIES



- * 36V, 2.6Ah capacity Lithium-ion battery
- * Side type cooling windows
- * Suits charger UC36YRL



HTC-D6SH 6.5mm - 240W DRILL

- * Compact, well balanced design
- * Fast drilling speed
- * Stopper can be installed on both sides

Specifications:

Chuck Capacity	0.5 - 6.5mm
Capacity: Steel	6.5mm (1/4")
Wood	9mm (3/8")
Power Input	240W
No Load Speed	4,500/min
Overall Length	206mm (8-1/8")
Weight	0.9kg (2.0 lbs)
Standard Accessories	Chuck Wrench, Hook



HTC-D10VC2 10mm - 460W DRILL - VAR/REV

- * Compact, just 238mm in length
- * Chuck offset only 26mm
- * Variable speed dial trigger
- * Cylindrical housing
- * Lightweight - only 1.3kg
- * Power input 460W

Specifications:

Drill Chuck Capacity:	1.0 - 10mm (1/32-3/8")
Capacity: Steel	10mm (3/8")
Wood	25mm (1")
Power Input	460W
No Load Speed	0-2,300/min
Overall Length	238mm (9-3/8")
Weight	1.3kg (2.9 lbs)
Standard Accessories	Chuck Wrench



HTC-D10VF 10mm - 710W DRILL - VAR/REV

- * Max torque 16Nm (139in.-lbs)
- * Keyless chuck
- * Large, variable speed trigger
- * Attractive, ergonomic design
- * Soft grip handle
- * Heavy duty, metal gear housing

Specifications:

Chuck Capacity	0.8 - 10mm (1/32 - 3/8")
Capacity: Chuck	
Steel Twist Bit	10mm (3/8")
Wood Flat Bit	25mm (1")
Hole Saw	29mm (1-1/8")
Power Input	710W
No Load Speed	0-3,000/min
Overall Length	265mm (10-7/16")
Weight	1.8kg (4.0 lbs)
Standard Accessories	Chuck Wrench



HTC-D13 13mm - 720W DRILL - REV

- * Convenient reversing switch
- * Easy to control, spade shaped handle

Specifications:

Chuck Capacity	1.5 - 13mm (1/16"-1/2")
Capacity: Steel	13mm (1/2")
Wood	40mm (1-5/8")
Power Input	720W
No Load Speed	550/min.
Overall Length	378mm (14-7/8")
Weight	3.0kg (6.6 lbs.)
Standard Accessories	Chuck Wrench, Side Handle



HTC-DV13SS 13mm - 550W IMPACT DRILL

- * Power input 550W
- * Cylindrical housing for durability
- * Offset of chuck: 28mm

Specifications:

Capacity:	Chuck	1.5-13 mm (1/16-1/2") Keyed
	Concrete	13mm (1/2")
	Steel	13 mm (1/2")
	Wood	20mm (3/4")
Power Input		550W
No Load Speed		2,900/min.
Impact Rate		29,000/min.
Overall Length		270mm (10-19/32")
Weight		1.4kg (3.1 lbs.)
Standard Accessories		Chuck Wrench



HTC-DV13VSS 13mm - 550W IMPACT DRILL - VAR/REV - KEYLESS CHUCK

- * Variable speed by trigger
- * Reversible by lever switch
- * Keyed chuck or keyless chuck available by areas
- * Other features same as for model DV13SS

Specifications:

Capacity:	Chuck	1.5-13mm (1/16-1/2") Keyless
	Concrete	13mm (1/2")
	Steel	13 mm (1/2")
	Wood	20mm (3/4")
Power Input		550W
No Load Speed		0-2,900/min.
Impact Rate		29,000/min.
Overall Length		270mm (10-19/32")
Weight		1.4kg (3.1 lbs.)
Standard Accessories		-



HTC-DV16SS 13mm - 600W IMPACT DRILL

- * Power input 600W
- * Cylindrical housing for durability
- * Offset of chuck: 28mm

Specifications:

Capacity:	Chuck	1.5-16 mm (1/16-5/8")
	Concrete	16mm (5/8")
	Steel	13mm (1/2")
	Wood	25mm (1")
Power Input		600W
No Load Speed		2900/min.
Impact Rate		29000/min.
Overall Length		270mm (10-19/32")
Weight		1.5kg (3.3 lbs.)
Standard Accessories		Chuck Wrench, Side Handle, Depth Gauge



HTC-DV16VSS 13mm - 600W

IMPACT DRILL - VAR/REV - KEYLESS CHUCK

- * Variable speed by trigger
- * Reversible by lever switch
- * Keyed chuck or keyless chuck available by areas
- * Other features same as for model HTC-DV16SS



Specifications:

Drill Chuck	1.5 - 16mm (1/16 - 5/8") Keyless
Capacity:	Concrete 16mm (5/8")
	Steel 13mm (1/2")
	Wood 25MM (1")
Power Input	600W
No Load Speed	0 - 2,900/min.
Full Load Impact Rate	29,000/min.
Overall Length	270mm (10-19/32")
Weight	1.5kg (3.3 lbs.)
Standard Accessories	Side Handle, Depth Gauge, Carry Case,



HTC-DV18V 13mm - 690W

IMPACT DRILL - 2 SPEED VAR/REV

- * Fast drilling speed
- * Powerful motor input: 690W
- * Compact : 333mm in length
- * Lightweight: 2.0kg (4.4 lbs.)
- * Shortest chuck offset 23.5mm (15/16")
- * Soft grip handle
- * Two-finger sized trigger switch with speed dial



Specifications:

Drill Chuck Capacity:	1.5 - 13mm (1/16 - 1/2")
Concrete	High: 13mm (1/2") Low: 18mm (11/16")
Steel	High: 8mm (5/16") Low: 13mm (1/2")
Power Input	690W
No Load Speed	High: 0-3000/min. Low: 0-1000/min.
Full Load Impact Rate	High: 27300/min. Low: 8400/min.
Overall Length	333mm (13-1/8")
Weight	2.0kg (4.4 lbs.)
Standard Accessories	Side Handle, Depth Gauge, Chuck Wrench, Carry Case



HTC-DV20VB2 13mm - 790W

IMPACT DRILL - 2 SPEED VAR/REV

- * Power Input: 790W
- * Capacity in concrete: 20mm
- * Compact : 333mm in length
- * Lightweight: 2.2kg
- * Slip clutch
- * Fast drilling speed
- * Shortest chuck offset 23.5mm (15/16")
- * Soft grip handle
- * Two-finger sized trigger switch with speed dial



Specifications:

Drill Chuck Capacity:	1.5 - 13mm (1/16 - 1/2")
Concrete	High: 13mm (1/2") Low: 20mm (3/4")
Steel	High: 8mm (5/16") Low: 13mm(1/2")
Power Input	790W
No Load Speed	High: 0-3000/min. Low: 0-1000/min.
Full Load Impact Rate	High: 26000/min. Low: 8000/min.
Overall Length	333 (13-1/8")
Weight	2.2kg (4.9 lbs.)
Standard Accessories	Side Handle, Depth Gauge, Carry Case, Chuck Wrench



HTC-VTP16A 16mm - 800W IMPACT DRILL - 2 SPEED

- * Powerful motor: 800W
- * Chuck capacity: 16mm (5/8")
- * 2 selectable speeds



Specifications:

Drill Chuck Capacity:	3.2 - 16mm (1/8 - 5/8")
Concrete	High: 16mm (5/8") Low: 35mm (1-3/8")
Steel	High: 10mm (3/8") Low: 16mm (5/8")
Power Input	800W
No Load Speed	High: 1400/min. Low: 700/min.
Full Load Impact Rate	High: 20000/min. Low: 11200/min.
Overall Length	443mm (17-7/16")
Weight	3.8kg (8.4 lbs.)
Standard Accessories	Chuck Wrench, Side Handle, Depth Stopper



HTC-DH22PG 22mm - 620W ROTARY HAMMER DRILL (SDS-PLUS) 2 MODE VAR/REV

- * Most compact and lightweight in its class
- * Internal pressure adjustment system
- * No load hammering prevention mechanism (clutch cutting system)
- * Full load speed 0 - 1,500/min. forward action
- * Easy to install bit - single action
- * Idle striking prevention mechanism



Specifications:

Capacity: Concrete: Drill Bit	22mm (7/8")
Wood	24mm (15/16")
Mild Steel	13mm (1/2")
Power Input	620W
Bit Shank	SDS-plus
No Load Speed	0 - 1,500/min. for forward
Full Load Impact Rate Overall	0 - 6,200/min.
Length	289mm (11-3/8")
Weight	1.9kg (4.2 lbs.)
Standard Accessories	Side Handle, Depth Gauge, Carry Case



HTC-DH24PB3 24mm - 800W ROTARY HAMMER DRILL (SDS-PLUS) 2 MODE VAR/REV

- * 2-mode action: hammer drilling and drilling only
- * Improved design (Ball bearings to prevent grease leakage)
- * Power input 800W
- * Capacity for concrete: 24mm
- * New powerful design
- * Easy to install bit - single action
- * Non-slip double-layer moulded handle and gear cover
- * Compact: Length 351mm



Specifications:

Capacity: Concrete: Drill Bit	24mm (15/16")
Core Bit	50mm (2")
Mild Steel	13mm (1/2")
Power Input	800W
Bit Shank	SDS-plus
No Load Speed	0 - 1,050/min.
Full Load Impact Rate Overall	0 - 4,600/min.
Length	351mm (13-13/16")
Weight	2.3kg (5.1 lbs.)
Standard Accessories	Side Handle, Depth Gauge, Carry Case



HTC-DH24PC3 24mm - 800W ROTARY HAMMER DRILL (SDS-PLUS) 3 MODE VAR/REV

- * 3-mode action: hammer drilling, drilling only and hammering only
- * Other features same as for model DH24PB3

Specifications:

Capacity: Concrete:	Drill Bit	24mm (15/16")
	Core Bit	50mm (2")
	Mild Steel	13mm (1/2")
	Wood	32mm (1 1/4")
Power Input		800W
Bit Shank		SDS-plus
No Load Speed		0 - 1,150/min.
Full Load Impact Rate Overall		0 - 4,600/min.
Length		351mm (13-13/16")
Weight		2.4kg (5.3 lbs.)
Standard Accessories		Side Handle, Depth Gauge, Carry Case



HTC-DH28PC 28mm - 800W ROTARY HAMMER DRILL (SDS-PLUS) 3 MODE VAR/REV

- * For SDS-plus bit shank
- * 3-mode action: hammer drilling, drilling only and hammering only
- * Overall length 316mm
- * Soft grip handle
- * Idle hammering prevention system for durability

Specifications:

Capacity: Concrete:	Drill Bit	28mm (1-1/8")
	Core Bit	80mm (3-5/32")
	Mild Steel	13mm (1/2")
Power Input		720W
Bit Shank		SDS-plus
No Load Speed		0 - 1,050/min.
Full Load Impact Rate		0 - 4,000/min.
Overall Length		316mm (12-7/16")
Weight		3.5kg (7.7 lbs.)
Standard Accessories		Side Handle, Depth Stropper, Carry Case



HTC-DH30PC2 30-90mm - 850W ROTARY HAMMER - 3 MODE VARI-SPEED (SDS-PLUS)

- * 3-mode action: hammer drilling, drilling only and hammering only
- * Class-leading drilling-speed and demolishing performance
- * Compact - 355mm and well balanced
- * Soft grip handle
- * Variable lock mechanism

Specifications:

Capacity: Concrete:	Drill Bit	30mm (1-3/16")
	Core Bit	90mm (3-17/32")
	Mild Steel	13mm (1/2")
Power Input		850W
Bit Shank		SDS-plus
No Load Speed		0 - 850/min.
Full Load Impact Rate Overall		0 - 3,700/min.
Length		355mm (14")
Weight		4.3kg (9.5 lbs.)
Standard Accessories		Side Handle, Depth Stopper, Dust Cup, Syringe, Carry Case



Double Insulation



With Carrying Case



Variable Speed



Reversible



2 Speed



Keyless Drilling Chuck

HTC-DH38MS 38-105mm - 950W ROTARY HAMMER - 2 MODE ACTION VARI-SPEED (SDS MAX)

- * For SDS-Max bit shank
- * 2-mode action: hammer drilling and hammering only
- * Variable-lock mechanism for 12-angle tool positions
- * Functional & robust design



Specifications:

Capacity: Concrete:	Drill Bit	38mm (1-1/2")
	Core Bit	105mm (4-1/8")
Power Input		950W
Bit Shank		SDS-Max
No Load Speed		620min.
Full Load Impact Rate Overall		2,800min.
Length		433mm (17-1/16")
Weight		6.4kg (14.1 lbs.)
Standard Accessories		Side Handle, Carry Case



HTC-DH40MR 40-105mm - 950W ROTARY HAMMER - 2 MODE ACTION VARI-SPEED (SDS-MAX)

- * SDS Max shank with variable lock mechanism for 12-angle chisel positions
- * Constant speed control with variable speed
- * 2-mode action: hammer drilling and hammering only
- * A winner of the IF Design Award, 2004



Specifications:

Capacity: Concrete:	Drill Bit	40mm (1-9/16")
	Core Bit	105mm (4-1/8")
Power Input		950W
Bit Shank		SDS-Max
No Load Speed		240 - 480/min.
Full Load Impact Rate Overall		1,320 - 2,650/min.
Length		435mm (17-1/8")
Weight		6.5kg (14.3 lbs.)
Standard Accessories		Side Handle, Depth Stopper, Grease Pack, Wrenches, Carry Case



HTC-DH45MR 25,0J - 1200W ROTARY HAMMER - 2 MODE ACTION VARI-SPEED (SDS-MAX)

- * 2 mode action: Hammer drilling and hammering only
- * Fast Drilling
- * Constant speed control with variable speed
- * Internal double insulation in a sturdy aluminium frame
- * Soft grip handle plus side handle
- * SDS Max shank and variable lock mechanism for 12 different chisel angle positions



Specifications:

Capacity: Concrete Drill Bit	45mm (1-3/4")
Core Bit	125mm (4-29/32")
Power Input	1,200W
Bit Shank	SDS-Max
No Load Speed	120 - 140/min.
Full Load Impact Rate	1,200 - 2,500/min.
Overall Length	500mm (19-11/16")
Weight	8.0kg (17.6lbs)
Standard Accessories	Side Handle, Depth Stopper, Grease Pack, Wrenches, Carry Case



Double Insulation



With Carrying Case



Variable Speed



Reversible



2 Speed



Keyless Drilling Chuck

HTC-H45MR 12,5J - 950W CHIPPER (SDS MAX)

- * For SDS max bit
- * Easy to change tool by means of a single-step holder
- * Variable lock mechanism to adjust the tool at 12-step angles
- * Reliable mechanism prevents idle hammering for longer service life
- * Sturdy aluminium body with double insulated inner
- * Less recoil (feels like self chiseling)
- * Higher demolishing performance and lower vibration and noise



Specifications:

Power Input	950W
Full Load Impact Rate	3,000/min.
Bit Shank	SDS max
Overall Length	454mm (17-7/8")
Weight	5.9kg (13.0 lbs.)
Standard Accessories	Side Handle, Carry Case, Bull Point & Wrenches

HTC-H60MC 22J - 1350W DEMOLITION HAMMER (SDS MAX)

- * For SDS max bit shank
- * Power input 1,250W
- * Easy to change tool by means of a single-step holder
- * Variable lock mechanism to adjust tool at 12-step angle
- * Functional and robust design



Specifications:

Power Input	1,250W
Full Load Impact Rate	1,600/min.
Bit Shank	SDS Max
Overall Length	570mm (22-7/16")
Weight	10.2kg (22.5lbs)
Standard Accessories	Carry Case, Side Handle

HTC-H60MR 26J - 1350W DEMOLITION HAMMER (SDS MAX)

- * Durable aluminum housing
- * Soft grip, shock-absorbing handle
- * Injection-moulded carrying case
- * Easy to change tool by means of a single-step holder
- * Variable lock mechanism to adjust tool at 12-step angles
- * Unique design



Specifications:

Power Input	1,350W
Full Load Impact Rate	1,650/min.
Bit Shank	SDS Max
Overall Length	576mm (22-43/64")
Weight	10.5kg (23.1lbs)
Standard Accessories	Carry Case, Side Handle, Wrench, Bull Point



HTC-H65SC

39,5J - 1240W

DEMOLITION HAMMER - OIL BATH LUBRICATION 30MM HEX

- * Strong demolition power
- * Double insulation and sturdy aluminum frame
- * Auto-stop carbon brush



Specifications:

Power Input	1,240W
Full Load Impact Rate	1,400/min.
Bit Shank	30mm Hex. (1-3/16")
Overall Length	647mm (25-13/32")
Weight	15.0kg (33.0lbs)
Standard Accessories	Carry Case, Bull Point, Side Handle, Wrenches, Oil Feeder



HTC-H65SB2

42,0J - 1340W

DEMOLITION HAMMER - 30MM HEX

- * For 30mm hex type
- * Strongest demolition performance in this class
- * Internal double-insulated construction with sturdy aluminum frame
- * Soft grip and shock-absorbing handle
- * Soft grip side handle
- * A winner of the IF Design Award, 2006



Specifications:

Power Input	1340W
Full Load Impact Rate	1400/min.
Bit Shank	30mm Hex. (1-3/16")
Overall Length	726mm (28-19/32")
Weight	16.5kg (36.4 lbs.)
Standard Accessories	Carry Case, Bull Point, Side Handle, Wrenches



HTC-H70SA

42,0J - 1240W

DEMOLITION HAMMER - 30MM HEX

- * Most compact machine with T-handle to demolish downward
- * Reduced noise and vibration
- * Shock-absorbing handle
- * Dust proof double air vent construction
- * Internal double insulation



Specifications:

Power Input	1240W
Full Load Impact Rate	1400/min.
Bit Shank	30mm Hex. (1-3/16")
Overall Length	625mm (24-5/8")
Weight	18.0kg (39.7 lbs.)
Standard Accessories	Bull Point, Wrenches



Double Insulation



With Case



Shock Absorbing Handle

HTC-G12SS 115mm - 580W ANGLE GRINDER

- * Wheel dia 115mm
- * Motor input 580W with max. output of 630W
- * Excellent overload durability
- * Compact length: 254mm and lightweight: 1.4kg
- * Grinding wheel not supplied

Specifications:

Capacity: Wheel Dia	115mm (4-1/2")
Hole Dia	22mm (7/8")
Spindle Thread	M14 x 2
Power Input	580W
No Load Speed	11,000/min
Overall Length	254mm (10")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	Wrench, Side Handle



HTC-G12SR3 115mm - 730W ANGLE GRINDER

- * Wheel dia 115mm
- * Renewed larger cooling fan
- * Powerful motor: input 730W and max. output 950W
- * Most durable grinder in its class
- * Compact: length 254mm
- * Lightweight: 1.4kg
- * Slide switch on side of the tool body

Specifications:

Capacity: Wheel Dia	115mm (4-1/2")
Hole Dia	22mm (7/8")
Spindle Thread	M14 x 2
Power Input	730W
No Load Speed	10000/min
Overall Length	254mm (10")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	Side Handle, Wrench



HTC-G12S2 115mm - 800W ANGLE GRINDER

- * Wheel dia 115mm
- * Input 800W
- * Newly designed housing with powerful motor
- * Improved dust sealing bearings
- * Includes 2 position side handle

Specifications:

Capacity: Wheel Dia	115mm (4-1/2")
Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	800W
No Load Speed	11,000/min
Overall Length	250mm (9-7/8")
Weight	1.6kg (3.5 lbs.)
Standard Accessories	Side Handle, Depressed Centre Wheel, Wrench



HTC-G12SE2 115mm - 1200W ANGLE GRINDER

- * Powerful motor: Input 1200W and max power output 1900W
- * Motor more durable for overload and wear resistance
- * Convenient tool less wheel guard
- * Easy-to-use paddle switch

Specifications:

Capacity: Wheel Dia	115mm (4-1/2")
Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	1,200W
No Load Speed	11,000/min
Overall Length	321mm (12-5/8")
Weight	1.9kg (4.2 lbs.)
Standard Accessories	Side Handle, Depressed Centre Wheel, Wrench



HTC-G13SS 125mm - 580W ANGLE GRINDER

- * Wheel diameter 125mm
- * Motor input 580W
- * Max. output 630W
- * Excellent overload durability
- * Compact - length 254mm
- * Lightweight - 1.4kg

Specifications:

Capacity: Wheel Dia	125mm (5")
Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	580W
No Load Speed	10,000/min
Overall Length	254mm (10")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	Side Handle, Wrench



HTC-G13SR3 125mm - 730W ANGLE GRINDER

- * Wheel diameter 125mm
- * Renewed larger cooling fan
- * Powerful motor - Input 730W and max. output 950W
- * Most durable overload in its class
- * Compact - length 254mm
- * Lightweight - 1.4kg
- * Slide switch on side of tool body

Specifications:

Capacity: Wheel Dia	125mm (5")
Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	730W
No Load Speed	10,000/min
Overall Length	254mm (10")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	Side Handle, Wrench



Eco-Product



Double Insulation



Spindle Lock

HTC-G15SA2 150mm - 1200W ANGLE GRINDER

- * Wheel dia 150mm
- * Input 1200W
- * 3 position side handle
- * New dust seal design

Specifications:

Capacity:	Wheel Dia	150mm(6")
	Hole Dia	22.23mm (7/8")
	Spindle Thread	M14 x 2
	Power Input	1200W
	No Load Speed	8,500/min
	Overall Length	391mm (15-12/32")
	Weight	2.8kg (5.9 lbs.)
	Standard Accessories	Side Handle, Depressed Centre Wheel, Wrench



HTC-G18SG2 180mm - 2500W ANGLE GRINDER

- * Power Input 2500W max. output 3500W
- * Vibration-absorbing side handle
- * Tough motor for overload durability
- * Wear resistant motor
- * Dust proof construction
- * Renewed design & switch

Specifications:

Capacity:	Wheel Dia	180mm (7")
	Hole Dia	22.23mm (7/8")
	Spindle Thread	M14 x 2
	Power Input	2500W
	No Load Speed	8500/min
	Overall Length	478mm (8-13/16")
	Weight	5.0kg (11.0 lbs.)
	Standard Accessories	Side Handle, Wrench



HTC-G23SR 230mm - 2000W ANGLE GRINDER

- * Excellent overload durability
- * Power Input 2000W
- * Max power output 3300W with overload durability
- * Durable metallic holder of ball bearings
- * Externally accessible carbon brushes for easy replacement

Specifications:

Capacity:	Wheel Dia	230mm (9")
	Hole Dia	22.23mm (7/8")
	Spindle Thread	M14 x 2
	Power Input	2000W
	No Load Speed	6600/min
	Overall Length	463mm (18-7/32")
	Weight	4.3kg (9.5 lbs.)
	Standard Accessories	Side Handle, Wrench



HTC-G23SS 230mm - 2000W ANGLE GRINDER

- * Wheel dia 230mm
- * Power input 2200W + max. power output 3100W with overload durability



Specifications:

Capacity:	Wheel Dia	230mm(9")
	Hole Dia	22.23mm (7/8")
Spindle Thread		M14 x 2
Power Input		2,300W
No Load Speed		6,600/min
Overall Length		463mm (18-7/32")
Weight		4.3kg (9.5 lbs.)
Standard Accessories		Side Handle, Wrench



HTC-G23MR 230mm - 2500W ANGLE GRINDER

- * Wheel diameter 230mm
- * Double insulated aluminium housing - first in its class
- * Powerful motor: power input 2400W max. power output 4600W for overload durability
- * Tool-less wheel guard
- * Vibration absorbing side handle
- * Soft, non-slip handle for increased comfort



Specifications:

Capacity:	Wheel Dia	230mm (9")
	Hole Dia	22.23mm (7/8")
Spindle Thread		M14 x 2
Power Input		2400W
No Load Speed		6600/min
Overall Length		492mm (19-3/8")
Weight		5.4kg (11.9 lbs.)
Standard Accessories		Side Handle, Wrench



HTC-SAT180 180mm - 750W SANDER/POLISHER - 2 SPEED

- * 2 Applications: Sanding and polishing
- * 2-Speed: High and low



Specifications:

Capacity:	Sanding Disc	180mm (7")
	Wool Bonnet	180mm (7")
Spindle Thread		M14 x 2 or U5/8-11
Power Input		750W
No Load Speed		Lo: 1,900/min. Hi: 3,400/min
Overall Length		395mm (15-9/16")
Weight		2.9kg (6.4 lbs.)
Standard Accessories		Side Handle, Rubber Pad, Wool Bonnet, Types of Sanding Discs, Wrenches



HTC-GP2S2 25mm - 520W DIE GRINDER

- * Power input 520W
- * All ball bearing construction
- * Easy-to-grip housing
- * Internal carbon brush

Specifications:

Capacity: Collet Chuck	6mm (or 1/4")
Max. Wheel Dia	25mm (31/32")
Power Input	520W
No Load Speed	29,000/min
Overall Length	359.4mm (14-5/32")
Weight	1.7kg (4.0 lbs.)
Standard Accessories	Wrenches



Photo shown with an optional mounted wheel

HTC-GP3V 25mm - 760W DIE GRINDER (VAR)

- * Max wheel dia: 25mm (1")
- * Power input 760W
- * Variable speed by dial: 7,000 - 29,000/min.
- * Electronic control: Soft start and constant speed
- * Easy-to-grip housing

Specifications:

Capacity: Collet Chuck	6mm (or 1/4")
Max. Wheel Dia	25mm (1")
Power Input	760W
No Load Speed	7,000-29,000/min
Overall Length	406mm (16")
Weight	1.8kg (4.0 lbs.)
Standard Accessories	Side Handle, Collet Chuck, Wrenches



HTC-GP5V 25mm - 760W DIE GRINDER (VAR)

- * Max wheel dia: 50mm (2")
- * Power input 760W
- * Variable speed by dial: 2,000 - 8,300/min.
- * Electronic control: Soft start and constant speed
- * Easy-to-grip housing

Specifications:

Capacity: Collet Chuck	6mm (or 1/4")
Max. Wheel Dia	50mm (2")
Power Input	760W
No Load Speed	2,000-8,300/min
Overall Length	406mm (16")
Weight	1.9kg (4.2 lbs.)
Standard Accessories	Side Handle, Collet Chuck, Wrenches



HTC-GP13 125mm - 570W STRAIGHT GRINDER

- * For 125mm (5") grinding wheel
- * Power input 570W
- * Wheel 125x19x12.7mm
- * A36P grit

Specifications:

Capacity: External Dia	125mm (5")
Thickness	19mm (3/4")
Hole Dia	12.7mm (1/2")
Spindle Thread	M12 x 1.75
Power Input	570W
No Load Speed	4,800/min
Overall Length	598mm (23-1/2")
Weight	5.5kg (12.1 lbs.)
Standard Accessories	Grinding Wheel, Wrench



Double Insulation

HTC-CE16SA 1,6mm - 400W SHEAR

- * Smaller grip
- * Lightweight
- * Scrap guide protects operator's hand from cut-off strips
- * Easily replaceable blades have 8 cutting edges each

Specifications:

Capacity:	Steel	1.6mm (16 gauge)
	Stainless	1.2mm (18 gauge.)
Min. Cutting Radius		25mm (1")
Power Input		400W
No Load Speed		4700/min.
Overall Length		250mm (9-7/8")
Weight		1.7kg (3.7lbs.)
Standard Accessories		Blade Set, Thickness Gauge, Hex. Bar Wrench



HTC-CN16SA 1,6mm - 400W NIBBLER

- * Smaller grip
- * Compact and lightweight
- * 3 positive stop die holder permits straight, right and left cutting
- * Downward cutting permits cutting of trapezoidal metal plate

Specifications:

Capacity:	Steel	1.6mm (16 gauge)
	Stainless	1.2mm (18 gauge)
Cutting Width		5mm (3/16")
Min. Cutting Radius		40mm (1-9/16")
Power Input		400W
No Load Speed		2300/min.
Overall Length		250mm (9-7/8")
Weight		1.6kg (3.5lbs.)
Standard Accessories		2 x Hex. Bar Wrenches



HTC-C6SS 165mmØ - 1050W CIRCULAR SAW

- * Rigid aluminium base for fine cut
- * Side handle easy to grip
- * Backward dust emission

Specifications:

Capacity: Blade Dia.		165mm (6-1/2")
Max Cut Depth:	90°	57mm (2-1/4")
	45°	38mm (1-1/2")
Power Input		1050W
No Load Speed		5,500/min.
Overall Length		276mm (10-7/8")
Weight		4.0kg (8.8 lbs.)
Standard Accessories		Blade, Guide, Adapter for Dust Collector Bolt, Wrench



HTC-C7SS 190mmØ - 1050W CIRCULAR SAW - ELECTRIC BRAKE

- * For 190mm (7-1/2") Blade

Specifications:

Capacity: Blade Dia.		190mm (7-1/2")
Max Cut Depth:	90°	68mm (2-11/16")
	45°	46mm (1-7/8")
Power Input		1050W
No Load Speed		5,500/min.
Overall Length		291mm (11-15/32")
Weight		3.4kg (7.5 lbs.)
Standard Accessories		Blade, Guide, Wrench



Eco-Product



Double Insulation



Spindle Lock



Electronic Brake



Dust Extracting Type

HTC-C7ST 185mmØ - 1710W CIRCULAR SAW - ELECTRIC BRAKE

- * For 185mm (7-1/4") Blade
- * Power input 1,710W
- * Lightweight in comparison with 1,700W class

- Hitachi circular saws
- * Enhanced max cut depth
- * Blower over base

Specifications:

Capacity: Blade Dia.	185mm (7-1/4")
Max Cut Depth:	90° 62mm (2-7/16") 45° 47.5mm (1-7/8")
Bevel Capacity	0-45°
Power Input	1710W
No Load Speed	6,000/min.
Overall Length	310mm (12-13/64")
Weight	4.3kg (9.4 lbs.)
Standard Accessories	Blade, Guide, Wrench, Carry Case



HTC-C7U2 190mmØ - 1200W CIRCULAR SAW

- * For 190mm (7-1/2") Blade
- * Compact and lightweight: 4.0kg
- * Low noise and vibration
- * Comfortable, soft grip handle
- * Base and lower guard manufactured from heavy duty die cast aluminium for precise cutting
- * Large depth adjuster knob for ease of use

Specifications:

Capacity: Blade Dia.	190mm (7-1/2")
Max Cut Depth:	90° 66mm (2-19/32") 45° 48mm (1-7/8")
Power Input	1200W
No Load Speed	5500/min.
Overall Length	312mm (12-9/32")
Weight	4.0kg (8.8 lbs.)
Standard Accessories	Blade, Guide, Adapter for Dust Collector Bolt, Wrench



HTC-C9U2 235mmØ - 2000W CIRCULAR SAW

- * Compact and lightweight: 6.8kg
- * Gear Cover manufactured from die-cast magnesium alloy
- * Low noise and vibration
- * Comfortable soft grip handle
- * Base and lower guard manufactured from heavy duty die cast aluminium for precise cutting
- * Large depth adjuster knob for ease of use
- * Includes cutting guide

Specifications:

Capacity: Blade Dia.	235mm (9-1/4")
Max Cut Depth:	90° 86mm (3-3/8") 45° 65mm (2-9/16")
Power Input	2000W
No Load Speed	5000/min.
Overall Length	397mm (15-5/8")
Weight	6.8kg (15.0 lbs.)
Standard Accessories	Blade, Guide, Bolt, Wrench Adapter for Dust Collector




HTC-C9BU2 235mmØ - 2000W CIRCULAR SAW - ELECTRIC BRAKE

- * Convenient electric brake
- * PTFE coating base for smooth sliding on workpiece
- * Magnesium gear cover
- * Soft grip cover
- * Rigid aluminium base for fine cut
- * Large knob easy to adjust cut depth
- * Guide included

Specifications:

Capacity: Blade Dia.	235mm (9-1/4")
Max Cut Depth:	90° 86mm (3-3/8") 45° 65mm (2-9/16")
Power Input	2000W
No Load Speed	5000/min.
Overall Length	397mm (15-5/8")
Weight	6.8kg (15.0 lbs.)
Standard Accessories	Blade, Guide, Bolt, Wrench Adapter for Dust Collector



HTC-FCJ65S3 65mm - 400W JIG SAW

- * Large soft grip for comfortable operation
- * Motor with two ball-bearings for longer life and efficient power transmission
- * Compact and lightweight: 1.5kg
- * Dust blowing for clear view over cut line
- * Connects directly to a dust collector without adapter

Specifications:

Capacity: Wood	65mm (2-5/8")
Mild Steel Plate	6mm (1/4")
Min. Cutting	25mm (1")
Base Tilt Angle Radius	45° Right/Left
Power Input	400W
Length of Stroke	18 mm (45/64")
No-Load Speed (stroke)	3,000/min.
Overall Length	197mm (7-3/4")
Weight	1.5kg (4.2 lbs.)
Standard Accessories	Blade, Splinter Guard, Chip Cover, Wrench



HTC-FCJ65V3 65mm - 400W (VAR) JIG SAW (VAR)

- * Large soft grip for comfortable operation
- * Motor with two ball-bearings for longer life and efficient power transmission
- * Compact and lightweight: 1.5kg
- * Dust blowing for clear view over cut line
- * Connects directly to a dust collector without adapter
- * Variable speed by means of dial and trigger

Specifications:

Capacity: Wood	65mm (2-5/8")
Mild Steel Plate	6mm (1/4")
Min. Cutting Radius	25mm (1")
Base Tilt Angle	45° Right/Left
Power Input	400W
Length of Stroke	18 mm (45/64")
No-Load Speed (stroke)	0 - 3000/min.
Overall Length	197mm (7-3/4")
Weight	1.5kg (4.2 lbs.)
Standard Accessories	Blade, Splinter Guard, Chip Cover Wrench



HTC-CJ110MV 110mm - 720W JIG SAW (VAR)

- * Variable speed by means of dial and trigger
- * Tool less blade change
- * New orbital locus and balanced design for low vibration and smooth cutting
- * Powerful input: 720W motor
- * 3 mode orbital action
- * LED light
- * Soft grip handle
- * Lightweight: 2.2kg
- * Dust blowing for clear view over cut line

Specifications:

Capacity: Wood	110mm (4-5/16")
Mild Steel Plate	10mm (3/8")
Min. Cutting Radius	25mm (1")
Base Tilt Angle	45° Right/Left
Power Input	720W
Length of Stroke	26 mm (1")
No-Load Speed (stroke)	850 - 3000/min.
Overall Length	246mm (9-41/64")
Weight	2.2kg (4.9 lbs.)
Standard Accessories	Blade, Splinter Guard, Chip Cover, Dust Collection Adapter, Carrying Case



HTC-CJ110MVA 110mm - 720W JIG SAW (VAR)

- * Variable speed by means of dial and trigger
- * Tool less blade change
- * New orbital locus and balanced design for low vibration and smooth cutting
- * Powerful input: 720W motor
- * 3 mode orbital action
- * LED light
- * Soft grip handle
- * Lightweight: 2.2kg
- * Dust blowing for clear view over cut line
- * Barrel Grip

Specifications:

Capacity: Wood	110 mm (4-5/16")
Mild Steel Plate	10mm (3/8")
Min. Cutting Rad.	25mm (1")
Base Tilt Angle	45° Right/Left
Power Input	720W
Length of Stroke	26mm (1")
No-Load Speed(stroke)	850 – 3000/min.
Overall Length	264 (10-25/64")
Weight	2.2kg (4.9 lbs.)
Standard Accessories	Blade, Splinter Guard, Chip Cover, Dust Collection Adapter, Carrying Case



HTC-CR13VBY 130mm - 1150W RECIPROCATING SAW 2-MODE ACTION VAR

- * Uses Vibration Protection
- * 150mm curved blade
- * 2 mode cutting action : straight & swing cutting on both normal & upside down blade positions
- * Toolless adjustable shoe by shoe button
- * Dust & water-resistant triple-seating construction

Specifications:

Capacity: Pipe	130 mm (5")
Steel Plate	19mm (3/4")
Wood	300mm (11-13/16")
Power Input	1,150W
Length of Stroke	32mm (1-1/4")
No-Load Speed(stroke)	0 – 3000/min.
Overall Length	465 (18-5/16")
Weight	4.4kg (9.7 lbs.)
Standard Accessories	Blade, Carrying Case




HTC-M8SA2 8mm - 900W ROUTER

- * Powerful motor: input 900W
- * Soft grip handle with ergonomic design
- * Improved clutch for collet chuck
- * Fine adjustment knob (optional)

Specifications:

Capacity: Collet Chuck	8mm (or 1/4")
Stroke	60mm (2-3/8")
Power Input	900W
No Load Speed	25000m/min.
Weight	3.2kg (7.1 lbs.)
Standard Accessories	Straight Guide, Template Guide, Wrench



HTC-M12V2 12mm - 2000W ROUTER - ELECTRONIC CONTROL

- * Powerful motor: input 2000W
- * Electronic Control: Soft start and constant speed
- * Variable speed dial on handle grip for better usability
- * Better routing operability when used with an optional bench stand
- * Soft grip handle with ergonomic design
- * Improved clutch for collet chuck
- * Dust guide
- * Includes 2 collet chucks - 12mm & 8mm

Specifications:

Capacity: Collet Chuck	12mm (or 1/2")
Stroke	65mm (2-9/16")
Power Input	2000W
No Load Speed	8000-22000/min
Weight	3.4kg (7.5 lbs.)
Standard Accessories	2 Collect Chucks, Centering Gauge, Straight Guide, Template Gauge, Template Guide Adapter, Dust Guide, Dust Guide Adapter, Wrench



HTC-M12SE 12mm - 2000W ROUTER

- * Power input 1,700W
- * 3-angle adjustable handle
- * Ease to adjust routing depth

Specifications:

Capacity: Collet Chuck	12mm (or 1/2")
Stroke	65mm (2-9/16")
Power Input	1,700W
No Load Speed	22,000m/min.
Weight	5.3kg (11.7 lbs.)
Standard Accessories	Parallel Straight Guide, Template Guide, Wrench




HTC-M12VE 12mm - 2000W ROUTER - ELECTRONIC CONTROL

- * Power input 2000W
- * Electronic Control: Soft start and constant speed
- * 3-angle adjustable handle
- * Ease to adjust routing depth

Specifications:

Capacity: Collet Chuck	12mm (or 1/2")
Stroke	65mm (2-9/16")
Power Input	2000W
No Load Speed	8,000-22,000m/min.
Weight	5.3kg (11.7 lbs.)
Standard Accessories	Straight Guide, Template Guide, Wrench



HTC-P20SB 82mm - 570W PLANER - 1mm D.O.C

- * Compact and lightweight
- * High rotation speed: 15000/min.

Specifications:

Capacity: Cutting Width	82mm (3-1/4")
Max. Cut Depth	1mm (1/32")
Power Input	570W
No Load Speed	15000/min.
Overall Length	296mm (11-21/32")
Weight	2.5kg (5.5 lbs.)
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench



HTC-P20SA2 82mm - 720W PLANER - 3mm D.O.C.

- * Easy-to-use depth adjustment
- * Powerful motor for efficient cutting
- * Center V-groove on base sole
- * Aluminum alloy base for scratch-free work
- * Fast and easy blade replacement

Specifications:

Capacity: Cutting Width	82mm (3-1/4")
Max. Cut Depth	3mm (1/8")
Power Input	720W
No Load Speed	14000/min.
Overall Length	309mm (11-5/32")
Weight	3.0kg (6.6 lbs.)
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench



HTC-F30A 92mm - 900W PLANER - 3mm D.O.C.

- * Powerful motor: 900W
- * All ball bearing construction

Specifications:

Capacity: Cutting Width	92mm (3-5/8")
Max. Cut Depth	3mm (1/8")
Power Input	900W
No Load Speed	12000/min.
Overall Length	410mm (16-5/32")
Weight	4.0kg (8.8 lbs.)
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench, Carry Case



Double Insulation



With Carry Case

HTC-SV12SG 110mm - 200W ORBITAL SANDER

- * All new design
- * Large soft grip fits in the palm of the hand for comfortable operation
- * High power and class top sanding
- * Class-top dust collecting performance

Specifications:

Capacity:	Pad Size	110 x 100mm (4-1/2 x 4")
Power Input		200W
Orbit Diameter		1.5mm (1/16")
No Load Speed:	Spindle	14000/min.
	Orbit	28000/min.
Overall Length		137mm (5-3/8")
Weight		1.1kg (2.4lbs)
Standard Accessories		Sanding Paper, Dust Bag



HTC-FSV10SA 92mm - 180W ORBITAL SANDER

- * Compact and lightweight
- * Low height and stable design
- * Low noise
- * Comfortable soft grip and larger trigger
- * New sand paper holder
- * Dust bag

Specifications:

Capacity:	Pad Size	92 x 184mm (3-5/8 x 7-1/4")
	Orbit Diameter	2mm (3/32")
Power Input		180W
No Load Speed:	Spindle	10000/min.
	Orbit	20000/min.
Overall Length		184mm (7-1/4")
Weight		1.3kg (2.9lbs)
Standard Accessories		Sanding Paper Dust Bag, Punch Plate




HTC-SV12SD 114mm - 300W ORBITAL SANDER

- * Excellent dust collection efficiency enabled by "Through the Base" dust extracting system
- * Flush sanding on 3 sides
- * Direct drive system for minimum vibration and smooth finishing
- * Lever-action, quick paper clamp system
- * All bearing construction

Specifications:

Capacity:	Pad Size	114 x 228mm (4-1/2 x 9")
Power Input		300W
Orbital Dia		2.4mm (0.09")
No Load Speed:	Spindle	10000/min
	Orbit	20000/min
Overall Length		300mm (11-13/16")
Weight		2.8kg (6.2 lbs.)
Standard Accessories		Sand Paper, Dust Bag



HTC-SV12SH 110mm - 200W ORBITAL SANDER

- * Powerful 200W input motor
- * Large soft grip handle
- * Delta-shaped sanding pad for corner work
- * Innovative design
- * Class-top dust collecting performance

Specifications:

Capacity:	Pad Size	110 x 190mm (4-3/8 x 7-1/2")
	Triangle	96 x 96 x 96mm (3-3/4 x 3-3/4 x 3-3/4")
Power Input		200W
Orbit Diameter		1.5mm (1/16")
No Load Speed: Spindle		14000/min.
	Orbit	28000/min.
Overall Length		133mm (5-1/4")
Weight		1.0kg (2.2lbs)
Standard Accessories		Sanding Paper, Dust Bag



HTC-SV13YA 125mm - 230W RANDOM ORBITAL SANDER - (VAR)

- * Variable speed and stable speed control
- * Random orbit sanding action
- * Large, soft grip handle for comfort
- * High performance sanding and dust collection

Specifications:

Capacity: Standing Pad		125mm (5")
Power Input		230W
Orbit Dia		3.2mm (1/8")
No Load Speed		7000 - 12000/min
Overall Height		145mm (5-11/16")
Weight		1.4kg (3.1 lbs.)
Standard Accessories		Sanding Paper, Dust Bag



HTC-SB8V2 76mm - 1020W BELT SANDER - (VAR)

- * Sanding position visible through transparent cover
- * Powerful motor input: 1020W
- * Width 171mm
- * Variable speed by dial, and large, 2-finger trigger switch
- * Soft grip on handle and sub handle
- * Dust bag on the left for sanding at corner

Specifications:

Capacity: Belt Size		76 x 533mm (3 x 21")
Power Input		1020W
No Load Belt Speed		250 - 450m/min (820-1,475ft./min.)
Overall Length		318mm (12-33/64")
Weight		4.3kg (9.7 lbs.)
Standard Accessories		Sanding Belt, Dust Bag



HTC-SB10S2 100mm - 1020W BELT SANDER - 1 SPEED

- * Sanding position is visible through transparent cover
- * Soft grip on handle and sub handle
- * Single speed
- * 2 finger large trigger switch
- * Width 189mm
- * Belt size: 100 x 610mm
- * Dust bag on the left allows for easy corner sanding

Specifications:

Capacity: Belt Size		100 x 610mm (4 x 24")
Power Input		1,020W
No Load Belt Speed:		420m/min. (1380ft./min.)
Overall Length		363mm (14-19/64")
Weight		5.2kg (11.5 lbs.)
Standard Accessories		Sanding Belt, Dust Bag



HTC-W6VM

6mm - 620W

SCREWDRIVER - DRY WALL - VAR/REV

- * Ideal for self drilling TEK screws
- * Powerful motor: power input 620W
- * Detachable nose piece for ease of bit replacement
- * Comfortable, soft grip handle
- * Aluminium gear cover for durability

- * Soft protector around gear cover to prevent damage to workpiece and prevent heat conduction to hands
- * Large 2 finger sized trigger switch



Specifications:

Cap: Drywall Screw	6mm (1/4")
Self-Drilling Screw	6mm (1/4")
Bit Shank	6.35mm (1/4") Hex
Power Input	620W
No Load Speed	0 - 6000/min.
Overall Length	294mm (11-19/32")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	Driver Bit, Magnetic Bit Holder, Sub Stopper



HTC-W6VA4

6mm - 620W

SCREWDRIVER - DRY WALL - VAR/REV

- * Ideal for self drilling TEK screws
- * Powerful motor: power input 620W
- * Detachable nose piece for ease of bit replacement
- * Comfortable, soft grip handle
- * Aluminium gear cover for durability

- * Soft protector around gear cover to prevent damage to workpiece and prevent heat conduction to hands
- * Large 2 finger sized trigger switch



Specifications:

Cap: Drywall Screw	6mm (1/4")
Self-Drilling Screw	6mm (1/4")
Bit Shank	6.35mm (1/4") Hex
Power Input	620W
No Load Speed	0 - 3000/min.
Overall Length	294mm (11-19/32")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	Driver Bit, Magnetic Bit Holder, Sub Stopper



HTC-W6V4

6mm - 620W

SCREWDRIVER - DRY WALL - VAR/REV

- * Ideal for self drilling TEK screws
- * Powerful motor: power input 620W
- * Detachable nose piece for ease of bit replacement
- * Comfortable, soft grip handle
- * Aluminium gear cover for durability

- * Soft protector around gear cover to prevent damage to workpiece and prevent heat conduction to hands
- * Large 2 finger sized trigger switch



Specifications:

Cap: Drywall Screw	6mm (1/4")
Self-Drilling Screw	6mm (1/4")
Bit Shank	6.35mm (1/4") Hex
Power Input	620W
No Load Speed	0 - 4500/min.
Overall Length	294mm (11-19/32")
Weight	1.4kg (3.1 lbs.)
Standard Accessories	Driver Bit, Magnetic Bit Holder, Sub Stopper



HTC-WR16SA 1/2" Sq. Dr. - 480W IMPACT WRENCH

- * For 1/2" (12.7mm) square drive
- * Most powerful and highest torque: 360Nm in this class
- * Capacity for high tension bolt 16mm
- * Reversible
- * Soft grip handle

Specifications:

Capacity: Bolt: Ordinary	12 - 22mm (1/2 - 7/8")
High Tension	12 - 16mm (1/2 - 5/8")
Torque	360Nm (3,180in.-lbs.)
Square Drive	1/2" (12.7mm)
Power Input	480W
No Load Speed	1900/min.
Impact Rate	2100/min.
Overall Length	258mm (10-5/32")
Weight	2.8kg (6.2 lbs.)
Standard Accessories	Side Handle



HTC-WR22SA 3/4" Sq. Dr. - 850W IMPACT WRENCH

- * For 3/4" (19mm) square drive
- * Most powerful and highest torque: 610Nm in this class
- * Capacity for high tension bolt 22mm
- * Durable aluminium housing and double insulation
- * Reversible
- * Soft grip handle

Specifications:

Capacity: Bolt: Ordinary	14 - 24mm (9/16 - 15/16")
High Tension	16 - 22mm (5/8 - 7/8")
Torque	610Nm (5,390in.-lbs.)
Square Drive	3/4" (19mm)
Power Input	850W
No Load Speed	1800/min.
Impact Rate	2000/min.
Overall Length	303mm (11-15/16")
Weight	4.8kg (10.6 lbs.)
Standard Accessories	Side Handle



HTC-RB40VA 3,8m³/min - 550W BLOWER - VARIABLE

- * Variable speed by means of trigger and dial
- * Powerful blower
- * Air volume flow: 3.8m³/min
- * Soft grip handle
- * Innovative design
- * Self standing
- * Dust bags available as a standard accessory

Specifications:

Capacity: Air Pressure	0 - 5.5 kPa
Air Volume Flow	0 - 3.8 m³/min
Power Input	550W
No Load Speed Overall	0 - 16000min.
Length	447mm
Weight	1.7kg
Standard Accessories	Nozzle, Dust Bag



Eco-Product



Double Insulation



Reversible



Variable Speed

HTC-CC14SF 2000W CUT-OFF MACHINE

- * Power input 2,000W
- * Sturdy aluminum housing and double insulation
- * Soft grip handle
- * Quick lock vise
- * Spark diversion guard
- * Spindle Lock

Specifications:

Capacity: Blade Dia	65mm (2-9/16")
Pipe Dia.	120mm (4-7/64")
Shaped Steel	130 x 130mm (5-1/8 x 5-1/8")
Power Input	2,000W
No Load Speed	3,800/min
Dimensions	603 x 318 x 603mm (23-47/64 x 11-7/32 x 23-47/64")
Weight	16.5kg (36.3lbs)
Standard Accessories	Cut-off Wheel, Wrenches



HTC-C10FCE2 255mmØ - 1,520W MITRE SAW

- * Lightweight - 11.9kg
- * Thumb actuated positive mitre stops for quick and easy adjustment
- * Soft grip handle
- * Large table
- * Equipped with chip deflector
- * Pivoting sub-fence supports larger stock

Specifications:

Capacity: Blade Dia	255mm
(H x W) Cross Cut: 0°	59 x 114mm or 89 x 101mm
Mitre Cut 45°	59 x 102mm or 89 x 70mm
Mitre Cut 52°	59 x 89mm or 89 x 54mm
Bevel Cut 45°	41 x 144mm
Compound Mitre 45° & Bevel 45°	41 x 102mm
Power Input	1,520W
No Load Speed	5,000/min
Mitre Angle: Right	0 - 52°
Left	0 - 52°
Bevel Angle: Left	0 - 45°
Positive Mitre Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	460 x 628 x 561mm
Weight	11.9kg
Standard Accessories	Blade, Dust Bag, Vise Assembly, Sub-Fence, Wrenches



HTC-C10FCH2 255mmØ - 1,520W MITRE SAW - LASER GUIDED

- * Laser guide system
- * Lightweight - 12.0kg
- * Thumb actuated positive mitre stops for quick and easy adjustment
- * Soft grip handle
- * Large table
- * Equipped with chip deflector
- * Pivoting sub-fence supports larger stock

Specifications:

Capacity: Blade Dia	255mm
(H x W) Cross Cut: 0°	59 x 114mm or 89 x 101mm
Mitre Cut 45°	59 x 102mm or 89 x 70mm
Mitre Cut 52°	59 x 89mm or 89 x 54mm
Bevel Cut 45°	41 x 144mm
Compound Mitre 45° & Bevel 45°	41 x 102mm
Power Input	1,520W
No Load Speed	5,000/min
Mitre Angle: Right	0 - 52°
Left	0 - 52°
Bevel Angle: Left	0 - 45°
Positive Mitre Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	460 x 628 x 561mm
Weight	12.0kg
Standard Accessories	Blade, Dust Bag, Vise Assembly, Sub-Fence, Wrenches



NEW

Sensortec (magnet indicator light)

**EUROBOOR
SENSORTEC**

The unique Euroboor Sensortec system.

The attachment force generated by your magnet depends on a number of factors:

- the thickness of the material to be drilled through
- any possible coating or paint layer present on the material
- chips or other dirt, oil or grease between the magnet and the material.

The new Euroboor electric drill magnets are equipped with a sensor that measures whether the magnet exercises sufficient attachment force to the material. The result of the measurement is presented by means of a LED indicator on the switch panel. The "red light" indicator warns you that there is insufficient force to attach the magnet, while the "green light" indicator indicates that there is sufficient force to do so.

**HITACHI
POWER TOOLS****HTC-BM20YK****13mm Drill - 770W****MAGNETIC BASE DRILL - 12-32mm MILLING CAPACITY**

- * Weight onlt 9.5kg
- * New dual coil High Density magnet with 1400kg pulling power
- * Compact
- * Centrally positioned operating

- buttons
- * High quality safety relay circuit
- * Reset safety in case of power failure
- * Delivery ready for use including accessories
- * 6 Months warranty

Specifications:

Capacity	Milling	12-32mm
	Twist Drill	13mm
No-Load Speed		550RPM
Power Input		770W
Magnetic Adhesion		1400kg
Weight		9.5kg
Standard Accessories		Auto Coolant System, 3 Hexagon, Wrenches, Cutting Oil, Ear Protectors Safety Glasses, Safety Gloves, Safety Chain, Carrying Case
		1 x 14mm Short Cutter
		1 x 18mm Short Cutter
		1 x 22mm Short Cutter

**HTC-ECO50****23mm Drill - 1150W**

MAGNETIC BASE DRILL 12-50mm MILLING CAPACITY NO. 2 MORSE TAPER

- * Weight only 13.0kg
- * Very compact
- * New dual coil High Density magnet with 1700kg pulling power
- * Strong 1150W durable H.P. motor
- * Dual speed control

- * Centrally positioned operating buttons
- * Optimal arbor bearing
- * High quality safety relay circuit
- * Reset safety in case of power failure
- * Delivered ready for use
- * 12 month warranty

Specifications:

Capacity	Milling	12-50mm
	MTS Drill	23mm (MT2)
Speed	1	250RPM
	2	450RPM
Power Input		1150W
Magnetic Adhesion		1850kg
Weight		13kg
Standard Accessories		3 Hexagon Wrenches, Cutting Oil, Ear Protectors, Safety Glasses, Safety Gloves, Safety Chain, Carrying Case.



With Carrying Case



2 Speed

Hitachi Power Tools,
Spares & Accessories



HTC-ECO100/4 32mm Drill - 1800W

MAGNETIC BASE DRILL 12-100mm MILLING CAPACITY - NO. 3 MORSE TAPER

- * Weight only 26.0kg
- * Robust machine
- * New dual coil High Density magnet with 3000kg pulling power
- * Strong 1800W durable H.P. motor
- * Dual mechanical speed control, both are electronic and stepless variable
- * Mechanical slipping clutch
- * Electronic overload protection
- * Stepless variable torque control
- * Clockwise and anti-clockwise switch with 'zero point' changeover safety
- * Centrally positioned operating buttons
- * Optimal dual arbor guidance
- * High quality safety relay circuit
- * Reset safety in case of power failure
- * Delivered ready for use
- * 12 month warranty

Specifications:

Capacity Milling	12-100mm
MTS Drill	32mm (MT3)
Speed 1	40-110RPM
2	120-175RPM
3	140-370RPM
4	220-600RPM
Power Input	1800W
Magnetic Adhesion	2700kg
Weight	26kg
Standard Accessories	3 Hexagon Wrenches, Cutting Oil, Ear Protectors, Safety Glasses, Safety, Gloves, Safety Chain, Carrying Case



HTC-ERM100-02 CORE DRILL GRINDING MACHINE

- * Core drill grinding machine is intended exclusively for grinding HSS and hard metal core drills
- * Used to sharpen the core drill in simplest possible manner
- * Core drills can be sharpened with maximum precision
- * Its robust and precise construction, low power requirement and ergonomic design enable instant operation
- * Adjustment and grinding are undertaken manually

Specifications:

Dimensions L x B x H	410 x 412 x 390 (without optics) 410 x 412 x 460 (with optics)
Net Weight	± 29kg
Power supply	230Volt, 50/60 Hz
Motor	230 Volts, 0.12 kW, 2,800 rpm
Travel path Motor carriage	75
Guidance carriage	215
Runtime of grinding discs	10
Grinding disc	Diamond grinding disc Coated galvanically
Diameter	125mm
Hole diameter	10mm
Core drill shaft bore	19mm (weld on shaft) serial 32mm (weld on shaft) optional



**HTC-LKF450/2****1100W****EUROBOOR BEVELING MACHINE**

- * The LKF450 is the ideal machine for making welding angles, to countersink drilled holes and to de-burr material
- * Adjustable depth
- * The quality of the weld side which is made with the LKF450 guarantees a better weld connection
- * Lightweight - only 4.7kg
- * Powerful "Soft-Start" 1100W motor
- * Suitable for steel, stainless steel and aluminium

**Specifications:**

Max Bevel Width	0 ~ 6 mm
Angle	45° (Can upgrade to 30° and radius 2.5mm)
No-Load Speed	3000-6000 RPM
Power Input	1100W
Weight	4.7 kg
Standard Accessories	Plastic Carry Case, 45° Milling Head including 2 Cutting Plates, Key (SW22)

**HTC-LKF200****1100W****EUROBOOR BEVELING MACHINE**

- * The LKF200 is the ideal machine for making welding angles
- * The angle and depth are adjustable
- * The quality of the weld side which is made with the LKF200 guarantees a better weld connection
- * The LKF200 is fast and due to the perfect finish, further work for completion is unnecessary
- * The LKF200 can be used on profiles, plates and pipes
- * The apparatus is supplied with an electronic overload safety cut out

Specifications:

Capacity	Depth	0 ~ 14 mm
	Angle	15° - 60°
Max Bevel Width		20 mm
No-Load Speed		2850 RPM
Power Input		1100W
Weight		22kg
Standard Accessories		Steel Carry Case, 2 Mill Heads, LKF225 Pipe/Tube, Accessory Bracket, 12 Cutting Plates, Assembly Tools

**HTC-EHC230****1700W****EUROBOOR PORTABLE CIRCULAR SAW**

- * Fast, burr free operation
- * No greasing or cooling necessary
- * Practical spark-free machining
- * Automatic chip collection
- * Variable sawing angle

Specifications:

Capacity	Depth	90° 82mm Tubes, 45° 56mm
	Angle	0 - 45°
	Blade	230mm
Max. Capacity		3 - 13mm
No-Load Speed		2600 RPM
Power Input		1700W
Weight		7.1kg
Max. Continuous Use		30 minutes

**BLADERUNNER SAW BLADES WITH OMNI CUTTING TECHNIQUE**

One blade enables you to cut steel, stainless steel or aluminium

Ø 230mm x 48T x 2.2 Axle
Hole = 25.4mm



With Carrying Case

Features:


1. Perfect start without sliding out of position
2. Conical polished inside surface
3. Precise centre pilot fitting
4. Polished clamp surface
5. Faster, because each tooth cuts
6. More accurate
7. Longer drill depth
8. Stronger, therefore less breakage
9. Much longer standing time
10. Guaranteed discharge of the slug

**CUTTERS - LONG SERIES (55mm)
"WELDON SHANK" from 12-60mm**

**CUTTERS - SHORT SERIES (30mm)
"WELDON SHANK" from 12-60mm**



Optimal centre pilot fitting

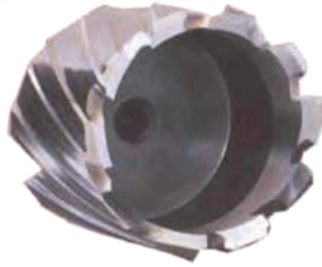

Conical inside surface



Double action teeth



Perfectly polished clamp surfaces



PILOT PINS

PRODUCT CODE	DESCRIPTION
HTCEIBC70	PILOT PIN 4.75MM CUTTERS 12-15MM 30MMD
HTCEIBC80	PILOT PIN CUTT 60MM+ WITH 30MMD
HTCEIBC90	PILOT PIN CUTT 50MM+ WITH 100MMD

MORSE-TAPER REDUCING SLEEVES

PRODUCT CODE	DESCRIPTION
HTCEMCV31	REDUCING SLEEVE MT3-MT1
HTCEMCV32	REDUCING SLEEVE MT3-MT2
HTCEMCV3Z	REDUCING SLEEVE MT3-MT2

DRILL CHUCKS & ADAPTORS

PRODUCT CODE	DESCRIPTION
HTCEIBK14	CHUCK ADAPTOR 3/4" WELDON to 1/2" X 20 IMB30/2
HTCEIBK16-2	CHUCK ADAPTOR TAPER-SHANK MT2-B16
HTCEIBK16	CHUCK TAPER-SHANK B16 (16MM)

"WELDON" CUTTER ARBORS

PRODUCT CODE	DESCRIPTION
HTCEMC2	MANUAL COOL MT2 - 3/4" WELDON (ECO 50)
HTCEMC3-32	MANUAL COOL MT3 - 1 1/4" WELDON (ECO 100/3)
HTCEMC3	MANUAL COOL MT3 - 3/4" WELDON (ECO 100/3)
HTCEIMC30-32	AUTO COOL MT3 - 1 1/4" WELDON (ECO100/3)

COUNTER SINK DRILLS

PRODUCT CODE	DESCRIPTION
HTCESCE30	COUNTERSINK BIT 10-30MM
HTCESCE40	COUNTERSINK BIT 10-40MM
HTCESCE50	COUNTERSINK BIT 15-55MM 90DIG 3/4"

COOLING ACCESSORIES & LUBRICANTS

PRODUCT CODE	DESCRIPTION
HTCEKSP100	AUTO COOL + LUBE SET
HTCEIBOP911	CUTTING LUBE 400ML AEROSOL

Hitachi Power Tools, Spares & Accessories

CHISELS

BULL POINT



SCALING CHISELS, ASPHALT CUTTERS



COLD CHISELS



**SCALING CHISELS
ASPHALT CUTTERS**

Code	Size/Breaker
HTCH24PC-7	SDS-PLUS 40 X 250MM
HTCH40MA-7	SDS-MAX 45 X 280MM
HTCKE85-7	H41 50 X 280MM
HTCKE90-8	H55 75 X 280MM
HTCKE89-8	H65 75 X 410MM
HTC993182L	H90 ASPHALT 120MM HEX

BULL POINT

Code	Size/Breaker
HTCH24PC-1	SDS-PLUS 250MM ROUND
HTC40MA-1	SDS-MAX 280MM ROUND
HTCH40MA-2	SDS MAX 400MM
HTCKE40-1	DH38 280MM ROUND
HTCKE90-1	H55 300MM ROUND
HTCKE90-3	H55 450MM ROUND
HTCKE89-2	H65 410MM ROUND
HTC993180L	H90 520MM BULL POINT

COLD CHISELS

Code	Size/Breaker
HTCH24PC-2	SDS-PLUS 250MM
HTCH24PC-5	SDS-PLUS 250MM
HTCH40MA-4	SDS-MAX 280MM
HTCH40MA-5	SDS-MAX 400MM
HTCKE40-6	DH38 450MM
HTCKE90-6	H55 450MM
HTCKE89-5	H65 410MM
HTC993181L	H90 COLD 520MM HEX

CHANNELING CHISELS

Code	Description
HTC-H24PC-7	250X40MM SDS+

DRILL CHUCKS & KEYS

- Easy to fit
- Suitable for all portable and cordless power drills



Code	Size
HTC705006	3/8" x 24 - 10mm
HTC950284	1/2" x 20 - 16mm



DRILL CHUCK & KEY

- Easy to fit
- Suitable for all portable and cordless power drills



Code	Capacity	Thread
MTS2230	10mm	3/8" x 24UNF
MTS2245	13mm	3/8" x 24UNF
MTS2250	13mm	1/2" x 20UNF



DRILL CHUCK KEYLESS

- Easy to fit
- Suitable for all portable and cordless power drills



Code	Capacity	Capacity
MTS2210	13mm	1/2" x 20UNF



DRILL CHUCK & KEY - 901325

- Multi craft range
- Bite hardened jaws
- Manufactured to DIN run out specifications
- Female mounts have a through hole to accept a L/Handed retaining screw for chucks fitted with reverse



Code	Capacity	Capacity Thread
JAC1080	13mm	1/2" x 20TPI



CHUCK KEYS

- A range of precision milled chuck keys to suit most power drills with chucks



Code	Size
SHA0750	10mm
SHA0755	13mm
SHA0780	4-in-1




ANGLE DRILL ATTACHMENT

- Drill easily in confined areas
- Interchangeable handle
- 10mm chuck with key
- 1:1 drive ratio



Code	Capacity
HON0230	10mm



Model	Code No.	
	Standard type	Auto-stop type
C C5YC	999043	999073
C6BU2	999056	-
C6BUY	999056	-
C6MF	999043	999073
C6SS	999043	999073
C6U2	999043	999073
C6UY	999043	999073
C7	999043	999073
C7BMR	999038	999071
C7BU2	999056	-
C7BUY	999056	-
C7D	999058	-
C7MF	999043	999073
C7MFA	999043	999073
C7SB2	999038	999071
C7SE	999043	999073
C7SS	999043	999073
C7ST	999043	-
C7U2	999043	999073
C7UY	999043	999073
C7YA	999038	999071
C8	999038	999071
C8FSE	999021*	-
	999001**	-
C8FSHE	999021*	-
	999001**	-
	999001***	-
C9BA2	999038	999071
C9BU2	999038	999071
C9SA2	999038	999071
C9U2	999038	999071
C10FCE2	999038*	-
	999065**	-
C10FCH2	999038*	-
	999065**	-
C10FSB	999043	999073
C10FSH	999043	999073
C12FCH	999038*	-
	999065**	-
C12FDH	999038	999071
C12LCH	999038*	-
	999065**	-
C12LDH	999038	999071
C12LSH	999038*	-
	999065**	-
C12RSH	999038*	-
	999065**	-
C12YB	332381	-
C13U	999044	999074
C15FB	999044	999074
CC12Y	999044	999074
CC14SF	999044	999074
CC16SA	999044	999074
CC16SB	999044	999074
CD7SA	999043	999073
CD14F	999060	-
CE16SA	999021	999070
CJ65S3	999041	999072
CJ65V3	999041	999072
CJ90VST	999041	999072
CJ110M	999041	999072
CJ110MV	999041	999072
CJ110MVA	999041	999072
CJ120V	999041	999072
CJ120VA	999041	999072
CL10SA	999021	999070
CM4SB2	999043	999073
CM4ST	999043	-
CM5SB	999088	999076
CM7MC	999061	999089
CM7MR	999044	999074
CM7MRU	999044	999074
CM9SR	999044	999074
CM12Y	999044	999074
CN16SA	999021	999070
CR13V2	999043	999073
CR13VB	999043	999073
CR13VBY	999043	999073
CR13VC	999043	999073

Model	Code No.	
	Standard type	Auto-stop type
C CR14DSL	999058	-
CR18DL	999058	-
CR18DMR	999058	-
CR18DSL	999058	-
CS-350A	999038	999071
D D6SH	999041	999072
D10VC2	999041	999072
D10VF	999041	999072
D10VG	999041	999072
D10VH	999041	999072
D10VJ	999041	999072
D10YB	999021	999070
D13	999043	999073
D13VB3	999041	999072
D13VF	999041	999072
D13VG	999041	999072
D13VH	999041	999072
DC120VA	999043	999073
DH14DL	999100	-
DH14DSL	999100	-
DH18DL	999100	-
DH18DSL	999100	-
DH22PG	999041	999072
DH22PH	999041	999072
DH24DV	-	999090
DH24DVA	-	999090
DH24DVC	999100	-
DH24PB3	999088	999076
DH24PC3	999088	999076
DH24PD3	999088	999076
DH24PM	999041	999072
DH25DAL	-	999090
DH25DL	-	999090
DH25PB	-	999070
DH28PC	999004	-
DH28PD	999004	-
DH30PC2	-	999073
DH36DL	-	999090
DH36DAL	-	999090
DH38MS	999043	999073
DH38SS	999043	999073
DH38YE2*	999043	999073
DH40FR	-	999073
DH40MR	-	999073
DH40MRY	-	999073
DH40SR	-	999073
DH45MR	-	999074
DH50MR	-	999074
DH50MRY	-	999074
DM20V	999041	999072
DS12DM	999054	-
DS14DL	999054	-
DS14DSAL	999054	-
DS14DSL	999054	-
DS18DL	999054	-
DS18DMR	999054	-
DS18DSAL	-	999054
DS18DSL	999054	-
DV14DL	999054	-
DV14DSL	999054	-
DV16V	999041	999072
DV18DL	999054	-
DV18DMR	999054	-
DV18DSL	999054	-
DV18V	999041	999072
DV20VB2	999041	999072
F F-30A	999043	999073
FCJ65S3	999041	-
FCJ65V	999041	-
FCJ65V3	999041	-
FD10SA	999041	-
FD10SB	999041	-
FD10VA	999041	-
FDV16VB2	999041	-
FSV10SA	999041	-
G G10SB1	999021	999070
G10SD2	999088	999076
G10SF2	999021	999070
G10SN	999005	-
G10SQ	999005	-
G10SR3	999005	-
G10SS	999021	999070
G10ST	999021	999070
G12S2	999088	999076
G12SA3	999088	999076
G12SE2	999088	999076
G12SN	999005	-
G12SQ	999005	-
G12SR3	999005	-

Model	Code No.	
	Standard type	Auto-stop type
G G12SS	999021	999070
G12VA	999088	999076
G13SB3	999088	999076
G13SC2	999043	999073
G13SD	999088	999076
G13SE2	999088	999076
G13SN	999005	-
G13SP	999088	999076
G13SQ	999005	-
G13SR3	999005	-
G13SS	999021	999070
G13V	999088	999076
G13VA	999088	999076
G13YC	999088	999076
G13YD	999088	999076
G13YF	999088	999076
G14DL	999054	-
G14DMR	999054	-
G14DSL	999054	-
G15SA2	999043	999073
G15VA	999088	999076
G15YC	999088	999076
G15YF	999088	999076
G18DL	999054	-
G18DMR	999054	-
G18DSL	999054	-
G18MR	999061	999089
G18SCY	999061	999089
G18SE3	999061	999089
G18SEY	999061	999089
G18SG2	999061	999089
G18SH2	999061	999089
G18SR	999044	999074
G18SS	999038	999071
G18SW	999038	999071
G18UBY	999061	999089
G23MR	999061	999089
G23MRU	999061	999089
G23SC3	999061	999089
G23SCY	999061	999089
G23SE2	999061	999089
G23SEY	999061	999089
G23SF2	999061	999089
G23SR	999044	999074
G23SRU	999044	999074
G23SS	999038	999071
G23SV	999038	999071
G23U2	999061	999089
G23UA2	999061	999089
G23UAY	999061	999089
G23UB2	999061	999089
G23UBY	999061	999089
GP2S2	999088	999076
H H25PV	999056	-
H41	999043	999073
H41SC	999043	999073
H45MR	999043	999073
H45MRY	999043	999073
H45SR	-	999073
H50	999043	999073
H50SA	999043	999073
H55SA	-	999071
H55SC	-	999071
H60KA	-	999074
H60MC	-	999074
H60MR	-	999074
H60MRV	-	999074
H65SB2	-	999086
H65SC	-	999086
H65SD2	-	999086
H70SA	-	999086
H70SD	-	999086
H90SC	-	999086
H90SE	-	999086
K KM12VC	999043	999073
L LDU4	999021	999070
M M6SB	999021	999070
M8SA2	999043	999073
M8V2	999043	999073
M12SA2	999044	999074
M12SE	999038	999071
M12V2	999044	999074
M12VC	999043	999073
M12VE	999038	999071
N NU-DH4	999041	999072
P P20SA2	999041	999072
P20SB	999021	999070
P20SE	999021	999070
PDA-100K	999021	999070

Model	Code No.	
	Standard type	Auto-stop type
P PDA-100M	999021	999070
PH-40F	999043	999073
PH-65A	999044	999074
PR-25B	999043	999073
PR-38E	999043	999073
PU-PM3	999043	999073
R RB40SA	999021	999070
RB40VA	999021	999070
RP35YB	999066	-
RP35YE	999066	-
S S15SB	999043	999073
S18SB	999043	999073
SAT-180	999043	999073
SAY-150A	999021	999070
SB8V2	999043	999073
SB10S2	999043	999073
SB10V2	999043	999073
SP18SA	999043	999073
SP18SB	999043	999073
SP18VA	999043	999073
SP18VB	999043	999073
SV12SD	999041	999072
SV12SE	999041	999072
SV12SG	999041	999072
SV12SH	999041	999072
SV12V	999041	999072
SV13YA	999041	999072
SV13YB	999041	999072
U UM12VST	333631	-
UM16VST	333631	-
V VB16Y	999043	999073
VTV-16	999043	999073
VTP-16A	999043	999073
W W4YD	999021	999070
W6V4	-	999091
W6VA4	-	999091
W6VB3	-	999091
W6VM	-	999091
W8VB2	-	999091
WH10DL	999054	-
WH12DM2	999054	-
WH14DL	999054	-
WH14DM	999054	-
WH14DMR	999054	-
WH14DSL	999054	-
WH18DL	999054	-
WH18DMR	999054	-
WH18DSL	999054	-
WP14DSL	999054	-
WR12DM2	999054	-
WR14DL	999054	-
WR14DM	999054	-
WR14DSL	999054	-
WR14VB	999021	999070
WR16SA	999021	999070
WR18DHL	999100	-
WR18DL	999054	-
WR18DMR	999054	-
WR18DSL	999100	-
WR22SA	999054	-

*For 110V-120V ** For 220V-240V



Black & Decker Power Tools

 **BLACK&DECKER**®



Black & Decker Power Tools

OUTLETS NATIONWIDE

592

Black & Decker Power Tools

Black & Decker has been setting the standard for innovation and design of power tools since 1910. As the inventor of the first portable electric drill with pistol grip and trigger switch,

Black & Decker offers a broad line of quality power tools used in and around the home and for commercial applications. When users need to get work done, they trust Black & Decker

for the power tools that will do the job efficiently and reliably.



594

Cordless Range



595

Percussion Hammer Drills



596

Angle Grinders



596

Polisher



597

Sanders



597

Jigsaw



598

Circular Saw



598

Router



598

Heat Gun



599

Dustbusters



599

Work Bench

BNDPP360-QW 4.8V RECHARGEABLE SCREWDRIVER

Features

- Four-position rotating drive helps you access screws in hard-to-reach spaces
- Easy-to-use lock/unlock makes it easy to adjust screw head position
- Compact size for optimal control
- LED work light illuminates work area
- 1/4" (6.4mm) universal hex chuck accepts the most common accessory bits

Specifications:

Voltage	4.8 V
No load speed	180RPM
Battery type	NiMH
Bit holder size	6.35 mm
Max torque	4Nm

Code

STAPP360-QW



BNDEPC14CA-QW 14.4V DRILL DRIVER

Features

24 torque clutch - For perfect screwdriving into a variety of materials with different screws sizes

Spring Loaded Slide Pack Battery System - For quick and easy battery change and a more secure fit

Reverse switch for added versatility

Variable speed - For ultimate finger tip control for all drilling applications

Specification

Voltage	14.4V
Battery type	Detachable
Capacity	1.2Ah
Charge time	3hr
Chuck	Keyless
Chuck size	10mm
Hammer	No
Clutch positions	24



Code

STAEP14CA-QW

BNDKR454-QS
450W PERCUSSION HAMMER DRILL
Features

- 450W power suitable for home drilling
- Hammer action suitable for drilling into masonry
- 10mm, high quality keyed chuck
- Lock on button for greater comfort

Specifications:

Power	450W
Voltage	230V
Chuck	Keyed
Chuck size	10mm
Hammer	Yes
Beats per minute	47600bpm
Max. Torque	3.7Nm
Max. capacity-wood	20mm

Code
STAKR454-QS


BNDKR504RE-QS
500W PERCUSSION HAMMER DRILL
Features

- 500W power suitable for home drilling
- Hammer action suitable for drilling into masonry
- 13mm, high quality keyed chuck
- Variable speed offers more control and is essential for screwdriving
- Lock on button for greater comfort

Specifications:

Power	500W
Voltage	230V
Chuck	Keyed
Chuck size	13mm
Hammer	Yes
Beats per minute	47600bpm
Max. Torque	3.7Nm
Max. capacity - wood	20mm

Code
STAKR504RE-QS


BNDCD714REK-AE
710W PERCUSSION HAMMER DRILL
Features

- 710W power suitable for home drilling
- Hammer action suitable for drilling into masonry
- 13mm, high quality keyed chuck
- Variable speed offers more control and is essential for screwdriving
- Secondary handle to provide additional control
- Lock on button for greater comfort

Specifications:

Power	710W
Voltage	230V
Chuck	Keyed
Chuck size	13mm
Hammer	Yes
Beats per minute	47600bpm
Max. Torque	4.5Nm
Max. capacity - wood	25mm

Code
STACD714REK-AE



BNDKG915-QS 900W 115MM SMALL ANGLE GRINDER

Features

- 115mm disc size - useful when working in confined spaces
- 900W motor provides an ideal balance between power, weight and size
- 2 position side handle for additional control and safety
- Spindle lock makes accessory changing quick and easy
- Tool free safety guard makes guard adjustment quick and easy
- Lock on switch assists with comfort and control



Specifications:

Power	900W
Voltage	230V
Wheel diameter	115mm
No load speed	10000rpm
Configuration	Body grip
Spindle size	M14mm
Spindle lock	Yes
Switch type	Slider

Code

STAKG915-QS

BNDKG2000D-AE 2000W 230MM LARGE ANGLE GRINDER

Features

- 230mm disc size is useful when a large depth of cut is needed
- 3 position side handle adds additional control and safety
- Spindle lock makes accessory changing quick and easy
- Lock off trigger prevents accidental start-up
- Safety guard ensures safe operation of tool
- 3 metre cable allows access to most work areas without the need for an extension cord



Specifications:

Power	2000W
Voltage	230V
Wheel diameter	230mm
Soft grip	Yes
Soft start	Yes
Adjustable gear case	No
No load speed	6500rpm
Configuration	End handle

Code

STAKG2000D-AE

BNDKP600 RANDOM ORBIT WAXER/POLISHER - 60 WATT

Features

- Ideal for waxing and polishing furniture, automobiles and boats
- Random orbit action for faster wax applications and finishing quality
- Front and end handle position for greater control
- Rubber grip provides comfort and prevents slipping
- Dust-seal rubber on/off switch for longer tool life
- 3 meter cable for optimum convenience
- Includes:
 - 1Pc foam applicator bonnet
 - 2pc wool polishing bonnets



Specification

Power	60W
Orbits/Min	4,400 Rpm
Wheel diameter	150mm
Cable length	3 m

Code


STAKP600

BNDKA168K-QS MOUSE® DETAIL SANDER

Features

- Auto Pressure Indicator indicates if you need to increase/decrease the amount of pressure on the sander for optimal stock removal
- Versatile - Ideal for paint / varnish, cleaning glass, removing rust and sanding in tight spaces
- Tear drop shaped base to access tight corners
- Removable tips allowing other profile tips to be added for greater versatility
- Detail base is designed to give better results when sanding intricate areas
- Quick fit sanding paper or faster sanding action and easier paper fitment

Code
STAK168K-QS

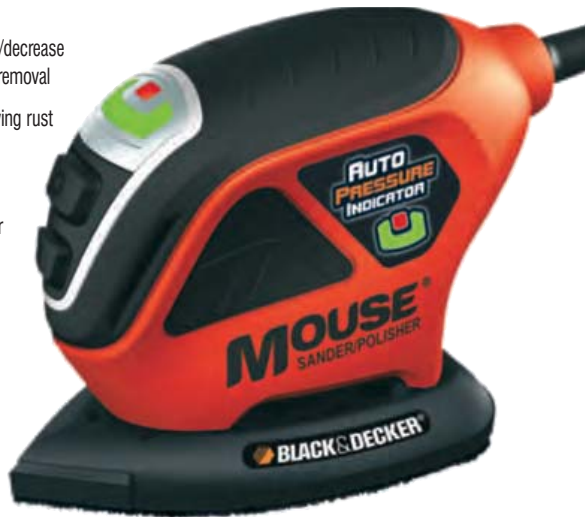

Specifications:

Power	55W
Voltage	230V
Speed	Single
No load speed	11000rpm
Eccentricity	0.75mm
Orbit diameter	1.5mm
Dust extraction [sanders]	Vacuum adaptor
Paper attachment	Quick fit

BNDKA310-QS 240W 1/3 SHEET SANDER

Features

- Compact power - Powerful 240W motor gets the job done quicker
- Compact design gets you closer to the work surface for greater control
- Large orbit size and high sander speed for faster material removal
- Versatile - Third sheet base sands flush to 3 sides
- Ideal for using on vertical surfaces such as doors and walls, for light to medium sanding tasks
- Lightweight sander with front and rear handles for maximum comfort and control
- Quick & easy paper change - hook & loop or traditional clip attachment

Code
STAKA310-QS



Specification

Power	240W
Speed	Single
No load speed	15000rpm
Eccentricity	1.0mm
Orbit diameter	2.0mm
Sanding actions	Orbital
Paper size	92 x 230mm
Platten size	91 x 189mm

BNDKS700PE-QS 480W VARIABLE SPEED PENDULUM JIGSAW

Features

- 3-stage pendulum action to increase cutting speed
- Variable speed trigger for increased control
- Universal blade clamp holds both U & T shank blades
- Integral dust blow feature clears the line of cut
- Integral dust extraction feature to keep the work area clean
- Small, lightweight & compact industrial design

Code
STAKS700PE-QS



Specification

Power	480W
Voltage	230V
Speed	Variable
Strokes	0-3000/min
Tool free blade clamp	No
'Lock on' switch	Yes
Bevel cut	0-45°
Dust blower	Yes

BNDKS1300-QS CIRCULAR SAW 1300W 65mm
Features

- 65mm depth of cut for fast and accurate rip, cross and bevel cuts
- Powerful 1300W motor for increased power and maximum performance
- Easy to set integral depth of cut adjustment
- Rise and fall depth setting function for optimum cutting performance
- Bale handle for added control and accuracy
- Spindle lock for easy blade change
- 20 tooth TCT saw blade


Specification

Power	1300W
Voltage	230V
Depth of cut	65mm
No load speed	5,000rpm
Blade diameter	190mm
Bore size	16mm
Bevel cut	0-45°
Dust extraction	Yes
Rip fence	Yes

Code
STAKS1300-QS
BNDKW1600EA-QS ROUTER 1/2" 1600W
Features

- 1600W motor for long life and high performance
- Flat motor housing enables product to be stood upside down for easy bit change
- Lock off trigger for enhanced safety
- 3 collets provided to suit shank sizes below 1/2" (6mm, 6.35mm and 8mm)
- 6 1/2" router bits included
- Template guide
- Edge guide
- Copy follower
- Distance plate for trimming vertical projections


Specifications:

Power	1600 W
Voltage	230 V
Speed	Variable
No load speed	11,000 – 28,000 rpm
Plunge depth	60mm
Collet size	6, 6.35, 8, 12.7mm
Maximum cutter dia	42mm
Spindle lock	Yes

Code
STAKW1600EA-QS
BNDKX2000ZA HEAT GUN 2000W
Features

- Essential tool for decorating or refinishing
- Pistol grip handle is well balanced for use over extended periods of time
- Comes complete with a kit box and a range of accessories
- Performs many different tasks with three temperature settings
- Lock- on switch for comfortable, hands free use


Specifications:

Power	2000W
Voltage	230V
Heat settings	Variable
Style	Pistol
Temp range	50-600 °C
Air flow	<650 l/min
Cable length	3m
Kit box	Yes

Code
STAKX2000-ZA

BNDNW4860-QW 4.8 V WET & DRY DUSTBUSTER VAC

Features

- 4,8V Power is ideal for general cleaning tasks around the home
- Combined benefits of wet and dry cleaning in one
- New bayonet release system: twist the bowl to open
- New wall hook: easier to change than ever with its integrated DC jack plug to charged when stored
- Special wet pick up accessory stored on board for increased wet vacuum capabilities
- Ergonomic design for comfortable use



Specifications:

Voltage	4.8V
Power (Air Watts)	9.6W
Suction Power	300mm/Water
Air Flow	815 l/min
Dustbowl Capacity	287 / Fluid 200ml
Run Time	8 min
Handle Style	Loop

Code

STANW4860-QW

BNDNV3603-QE 3.6V DUSTBUSTER® HAND VAC

Features

- 3.6V power is ideal for quick pick-up tasks around the home
- Cordless technology - grab & go
- Wall mounted charging system
- Bayonet release system: Twist the bowl to open and easily empty
- Ergonomic design for comfortable use
- Accessories conveniently stored under loop handle wherever you go they are always on hand



Specifications:

Voltage	3.6V
Power (Air Watts)	7.5W
Suction power	225mm/Water
Air flow	800l/min
Dustbowl capacity	286ml
Runtime	7.5min
First time charge	16 Hours
Handle style	Loop

Code

STANV3603-QE

BNDWM301-XJ PORTABLE WORKBENCH

Features

- Durable steel frame construction
- Folds flat for compact storage and easy transport
- Dual clamping cranks increase clamping force and versatility
- Adjustable swivel pegs and jaw retention grooves provide clamping versatility and reliable material hold
- Designed for easy set-up and clean-up
- Rubber feet are anti-slip



Specifications:

Working height	760 mm
Folded size	630 x 890 x 130 mm
Vice jaw opening	0 - 115 mm
Vice jaw length	610 mm
Max table width (jaws open)	341 mm
Maximum load	160 kg

Code

STAWM301-XJ